
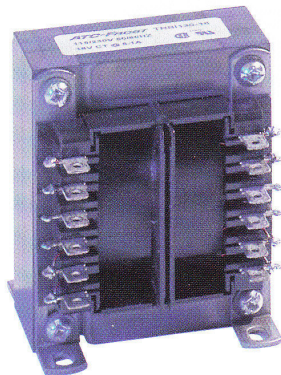


TRCI-TRBI Series

Chassis Mounting - International


Low Voltage Rectifier Transformers




Features:

- CSA/UL recognized component.
- LR16597, E105782.
- Designed to meet international standards.
- Industry standard mounting.
- Dual primary, dual secondary winding.
- Dual bobbin construction, high isolation.
- 4000V RMS dielectric tested.
- Class B -130°C Insulation system.
- UL 94V0 rated bobbin.
- Ratings from 25VA to 175VA.


115/230 Volt 50/60Hz Primary



TRCI Mounting
(25VA, 43VA Size)



TRBI Mounting
(80VA, 130VA, 175VA Size)



*Indicates Like Polarity

Dimensions (inches)							
VA (Size)	A	B	C	D	E	Term Size	Wt. lb.
25	2.81	2.22	2.31	2.38	-	.187	1.3
43	3.13	2.22	2.68	2.81	-	.187	1.6
80	2.50	2.61	3.00	2.00	2.18	.187	2.8
130	2.81	3.07	3.38	2.25	2.50	.250	4.1
175	3.12	3.20	3.75	2.50	2.50	.250	5.5

Cat. No.	VA (Size)	Secondary RMS Rating	
		Series	Parallel
TRCI 25-10	25	10VCT @ 2.5A	5V @ 5.0A
TRCI 43-10	43	10VCT @ 4.3A	5V @ 8.6A
TRBI 80-10	80	10VCT @ 8.0A	5V @ 16.0A
TRBI 130-10	130	10VCT @ 13.0A	5V @ 26.0A
TRBI 175-10	175	10VCT @ 17.5A	5V @ 35.0A
TRCI 25-12	25	12.6VCT @ 2.0A	6.3V @ 4.0A
TRCI 43-12	43	12.6VCT @ 3.4A	6.3V @ 6.8A
TRBI 80-12	80	12.6VCT @ 6.3A	6.3V @ 12.6A
TRBI 130-12	130	12.6VCT @ 10.3A	6.3V @ 20.6A
TRBI 175-12	175	12.6VCT @ 14.0A	6.3V @ 28.0A
TRCI 25-16	25	16VCT @ 1.6A	8V @ 3.2A
TRCI 43-16	43	16VCT @ 2.7A	8V @ 5.4A
TRBI 80-16	80	16VCT @ 5.0A	8V @ 10.0A
TRBI 130-16	130	16VCT @ 8.1A	8V @ 16.2A
TRBI 175-16	175	16VCT @ 11.0A	8V @ 22.0A
TRCI 25-20	25	20VCT @ 1.25A	10V @ 2.5A
TRCI 43-20	43	20VCT @ 2.2A	10V @ 4.4A
TRBI 80-20	80	20VCT @ 4.0A	10V @ 8.0A
TRBI 130-20	130	20VCT @ 6.5A	10V @ 13.0A
TRBI 175-20	175	20VCT @ 8.8A	10V @ 17.6A
TRCI 25-24	25	24VCT @ 1.0A	12V @ 2.0A
TRCI 43-24	43	24VCT @ 1.8A	12V @ 3.6A
TRBI 80-24	80	24VCT @ 3.3A	12V @ 6.6A
TRBI 130-24	130	24VCT @ 5.4A	12V @ 10.8A
TRBI 175-24	175	24VCT @ 7.3A	12V @ 14.6A
TRCI 25-28	25	28VCT @ 0.9A	14V @ 1.86A
TRCI 43-28	43	28VCT @ 1.5A	14V @ 3.0A
TRBI 80-28	80	28VCT @ 2.8A	14V @ 5.6A
TRBI 130-28	130	28VCT @ 4.6A	14V @ 9.2A
TRBI 175-28	175	28VCT @ 6.25A	14V @ 12.5A
TRCI 25-36	25	36VCT @ 0.7A	18V @ 1.4A
TRCI 43-36	43	36VCT @ 1.2A	18V @ 2.4A
TRBI 80-36	80	36VCT @ 2.2A	18V @ 4.4A
TRBI 130-36	130	36VCT @ 3.6A	18V @ 7.2A
TRBI 175-36	175	36VCT @ 4.8A	18V @ 9.6A
TRCI 25-230	25	230VCT @ 0.11A	115V @ 0.22A
TRCI 43-230	43	230VCT @ 0.19A	115V @ 0.38A
TRBI 80-230	80	230VCT @ 0.35A	115V @ 0.7A
TRBI 130-230	130	230VCT @ 0.57A	115V @ 1.14A
TRBI 175-230	175	230VCT @ 0.76A	115V @ 1.52A