


FPS Series

Energy Limiting Transformers


Direct Plug-in Class 2 Transformers

Features:

- Rugged, high-impact, flame retardant thermoplastic enclosure.
- Smooth, attractive lines with no sharp corners.
- Secondary screw terminals are hidden and protected from accidental shorting.
- Plugs into North American standard duplex receptacle.
- Unique additional support pin on 40VA models.
- Flexible secondary line cord, with or without jack, is available for special applications.
- North American approved by CSA (NRTL/C) to C22.2 No. 223-M91 and UL1310.
- LR67731.
- Most models utilize fuseless, energy-limiting design*.



20VA Size A

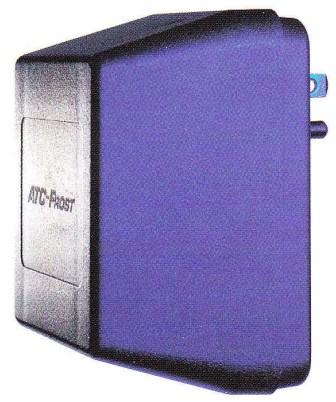

40VA Size B




Models 120 Volt - 60Hz

Cat. No.	VA	Secondary (RMS)		Secondary (RMS) N.L. Volts	Size	Weight	
		Volts	Amps.			lb.	Kg
FPS2012	20	12	1.67	13.8	A	.9	.41
FPS2014	20	14	1.43	15.9	A	.9	.41
FPS2016	20	16	1.25	18.4	A	.9	.41
FPS2018	20	18	1.11	21.3	A	.9	.41
FPS2024	20	24	0.83	27.9	A	.9	.41
FPS4012*	40	12.5	3.20	13.8	B	1.6	.73
FPS4016*	40	16.5	2.42	18.2	B	1.6	.73
FPS4024	40	24	1.67	27.4	B	1.6	.73

*FPS4012 and FPS4016 utilize a fuse for current limiting.

Dimensions - Size A & (B)

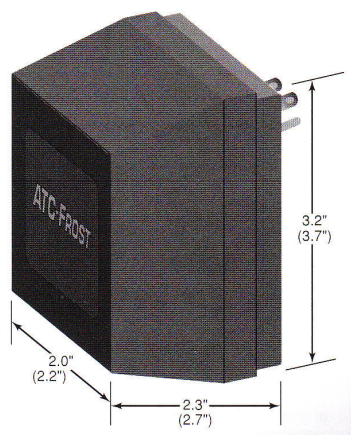

Other Available Styles

